



ZLPUV - STANDARD TEFZEL JACKET SILICONE ELASTOMER FIBERS		
ACTIVE DIAMETER FROM 100 TO 500 [MICRONS]	ACTIVE DIAMETER FROM 500 TO 1000 [MICRONS]	ACTIVE DIAMETER MORE THEN 1000 [MICRONS]
ZLPUV200/300T//450	ZLPUV600/750T//1010	
ZLPUV300/440T//660	ZLPUV800/950T//1400	
ZLPUV400/500T//600	ZLPUV1000/1150T//1650	
ZLPUV400/550T//700		
ZLPUV400/550T//850		

- NOTES:
1. HERAEUS SUPRASIL 311 ROAD .
  2. EXCELLENT TRANSMISSION IN THE RANGE 250-1100 NM.
  3. HIGH POWER LASER TRANSMISSION.
  4. STRESS PROOF LOAD 100KPSI.
  5. OPERATION TEMPERATURE FROM -40°C TO +150°C

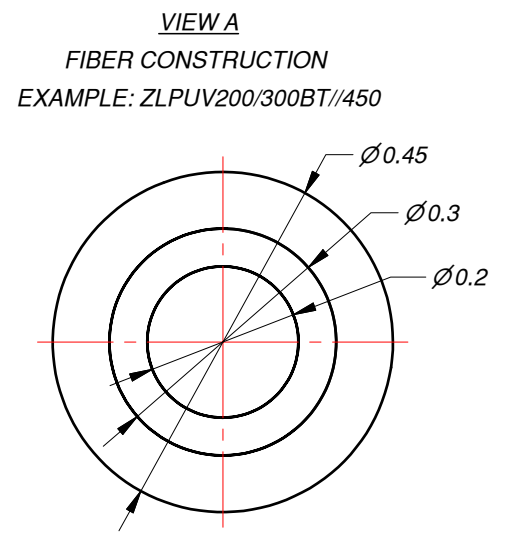

OTHER FIBER DIMENSION AVAILABLE ON REQUEST.  
PLEASE CONTACT US FOR DISCUSSIONS.

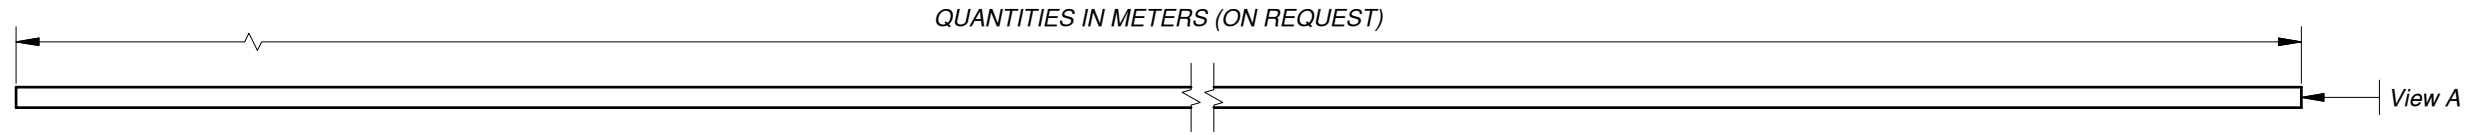

FIBER CODE EXPLANATION

ZLPUV **200** / **300** **B** T// **450** - **0.37**


PURE FUSED SILICA CORE [MICRONS]      SILICONE ELASTOMER COATING [MICRONS]      TEFZEL JACKET [MICRONS]      NUMERICAL APERATURE [NA]

JACKET COLOR

NATURAL
B BLACK

0.37 STANDARD, NA=0.37± 0.02

OTHER FIBER DIMENSION AVAILABLE ON REQUEST.  
PLEASE CONTACT US FOR DISCUSSIONS.

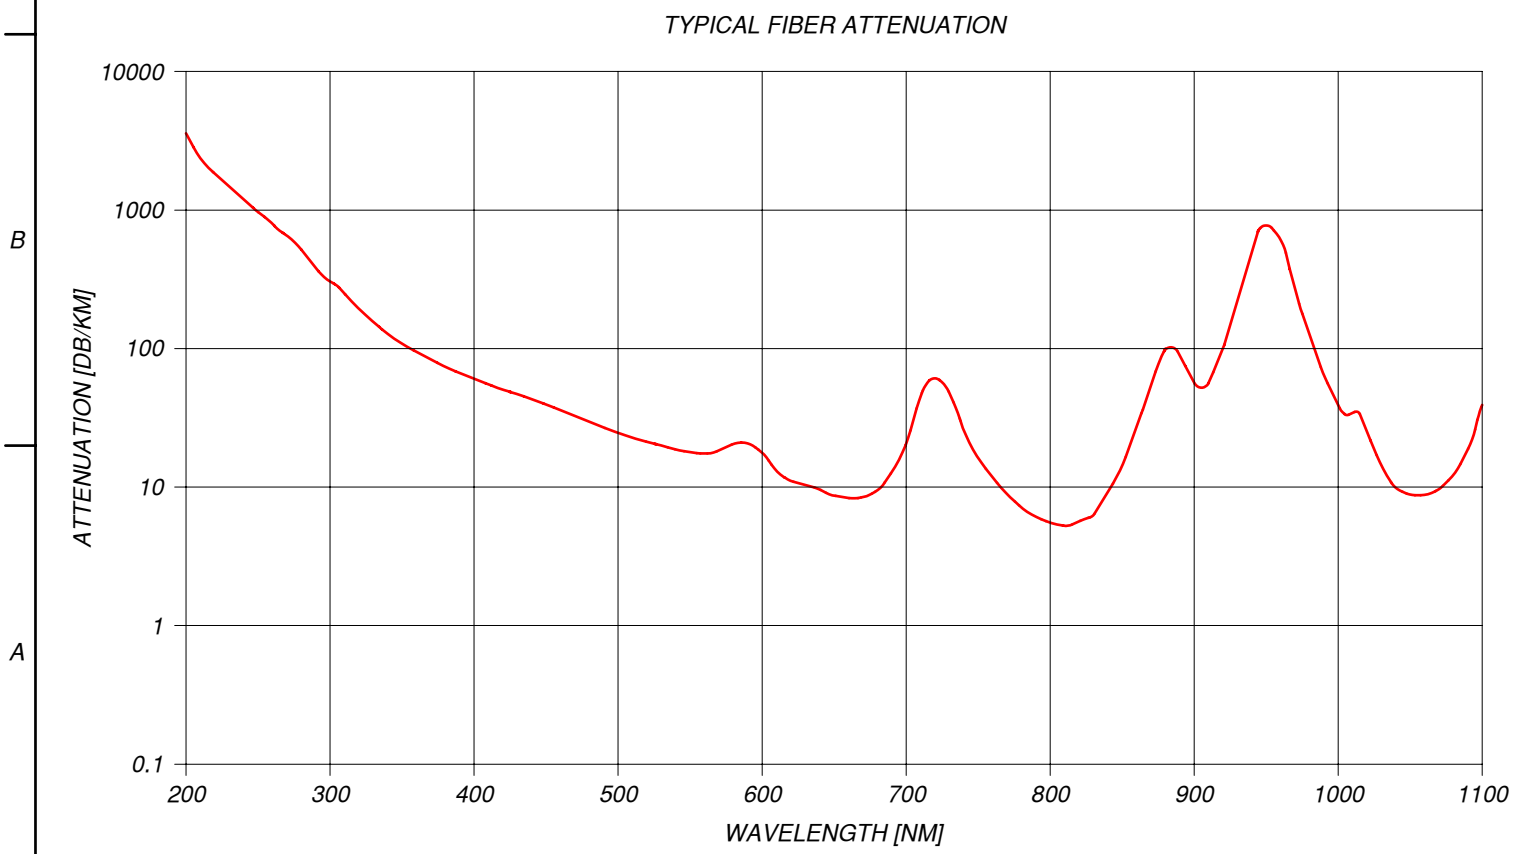

TITLE: <b>ZLPUV - TEFZEL JACKET SILICONE ELASTOMER FIBERS</b>		
SIZE: <b>A3</b>	DRAWING NO.: <b>ZLPUV-002-00</b>	REV.: <b>A</b>
FILE NAME: ZLPUV-TEFZEL.idw	ITEM NO.:	
COMPANY: Z-LIGHT, LTD.	CODE NO.:	
HOME PAGE: HTTP://WWW.Z-LIGHT.LV	ORDER NO.:	
SCALE: DO NOT SCALE	DIMENSIONS ARE IN MM	SHEET 1 OF 1